




alienpro.com.mx

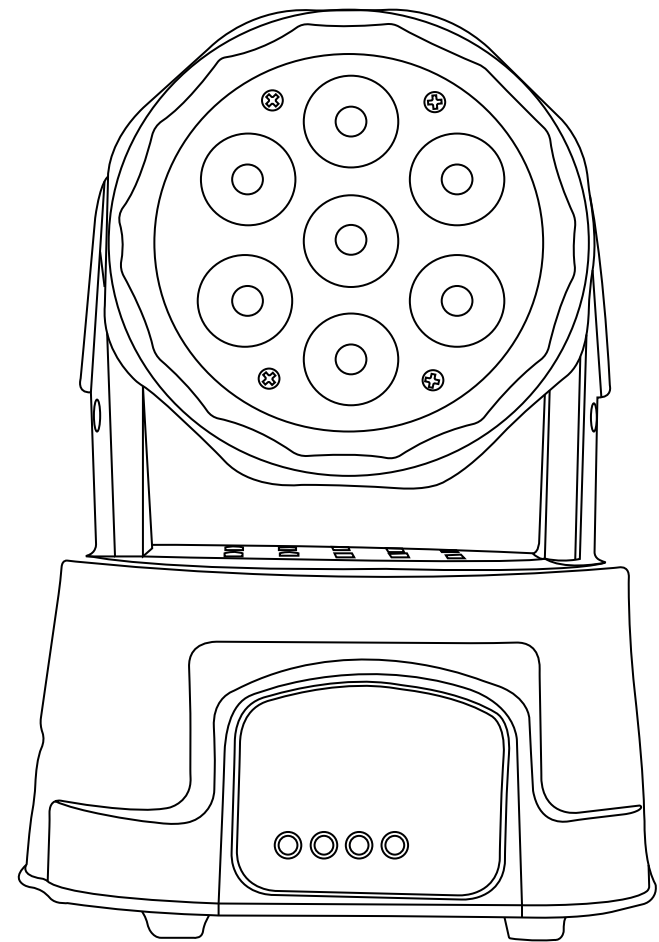

BABY WASH

MANUAL DE USUARIO

Chanel Model Function

7CH	0-255	Red dimming
8CH	0-255	Green dimming
9CH	0-255	Blue dimming
10CH	0-255	White dimming
11CH	0-7	Color selection
	8-231	Color combination 1
	232-255	Color jump
12CH	0-255	Color speed
13CH	0-7	No effect
	8-63	Auto 1 fast
	64-127	Auto 2 slow
	128-255	Sound
14CH	150-200	Reset



Channel		Function
1CH	0-255	Level
2CH	0-255	Vertical
3CH		Dimming and stroboscopic
	0-7	No effect
	8-134	Dimming 0~100%
	135-239	Strobe from low to fast
	240-255	medallion
4CH	0-255	Red dimming
5CH	0-255	Green dimming
6CH	0-255	Blue dimming
7CH	0-255	White dimming
8CH	0-255	Motor speed
9CH	150-200	Reset

Channel		Function
1CH	0-255	level
2CH	0-255	Level dimming
3CH	0-255	vertical
4CH	0-255	Vertical dimming
5CH	0-255	speed
6CH		Dimming and stroboscopic
	0-7	No effect
	8-134	Dimming 0~100%
	135-239	Strobe from low to fast
	240-255	medallion

Foreword

Thank you for purchasing this product. To optimize the performance of this product, before using, you must read the operating instructions carefully to familiarize yourself with the basic operation of the product. Keep this manual in a safe place for future reference.

This product was tested before shipping. Once purchased this product. Check that it is not in bad condition.

Safety Intruction

- Please keep this User Guide for future consultation.If you sell the unit to another user,be sure that they also receive this instruction booklet
- Unpack and check carefully there is no transportation damage before using the unit.
- Before operating,ensure that the voltage and frequency of power supply match the power requirements of the unit
- It's important to ground the yellow/green conductor to earth in order to avoid electric shock.
- The unit is for indoor use only.Use only in a dry location
- The unit must be installed in a location with adequate ventilation,at least 50cm from adjacent surfaces.Be sure that no ventilation slots are blocked
- Disconnect main power before replacement or servicing.
- Make sure there is no flammable materials close to the unit while operating as it is fire hazard.
- Use safety cable when fixes this unit.Don't handle the unit by taking its head only,But always by taking its base.
- Maximum ambient temperature is ta:40°C. Don't operate it where the temperature is higher than this.
- Unit surface temperature may reach up to 85°C. Dont touch the housing bare-hand during its operation.Turn off the power and allow about 15 minutes for the unit to cool down before replacing or serving.
- In the event of serious operating problem,stop using the unit immediately.Never try to repair the unit by yourself.Repairs carried out by unskilled people can lead to damage or malfunction.Please contact the nearest authorized technical assistance center.Always use the same type Spare parts.

Warning

- To prevent or reduce the risk of electrical shock or fire,do not expose the unit the rain or moisture.
- Do not open the unit within five minutes after switching off.
- The housing,the lenses, or the ultraviolet filter must be replaced if they are visibly damaged.

Caution

There are no user serviceable parts inside the unit.Do not open the housing or attempt any repairs yourself.In the unlikely event your unit may require service,Please contact your nearest dealer.

Installation

The unit should be mounted via its screw holes on the bracket. Always ensure that the unit is firmly fixed to avoid vibration and slipping while operating. And make sure that the structure to which you are attaching the unit is secure and is able to support a weight of 10 times of the unit's weight. Also always use a safety cable hold 12 times of the weight of the unit when installing the fixture.

The equipment must be fixed by professionals. And it must be fixed at a place where is out of the touch of people and has no one pass by or under it.

Technical Specifications

- Extremely small, fast and powerful LED Moving beam.
- DMX Channels: 9/14CH
- Pan/Tilt: 6300 / 2400, speed adjustable
- Smooth electronic dimming: 0-100%
- Electronic strobe with pulse and random effects
- High efficiency, low power consumption
- Super compact, low weight

Technical

Voltage: 100V-240V, 50/60Hz

Fuse: T6.3A

Power consumption: 80W

Light source: 10W LED x 7 (RGBW 4IN1)

Package: 4PCS/Carton

Inner Package: 270*220*250 MM

Out Package: 460*290*520 MM

N.W.: 12 kg/carton

G.W.: 14.5kg/carton

Menu Function

- Display
To show the various menus and the selected functions
- LED

DMX	On	DMX input Present
MASTER	On	Master Mode
SLAVE	On	Slave Mode
SOUND	Flashing	Sound activation

- Button

MENU	To select the programming functions
DOWN	To go backward in the selected functions
UP	To go forward in the selected functions
ENTER	To confirm the selected functions

- Mains Input
Connect to power supply.

Menu Function

- Mains Output
Connect to supply power to the next unit
- DMX Input / Output
For DMX512 link, use 3/5-pin XLR cable to link the unit together

