alienpro.com.mx

ALIENPRO®

THE BEST PERFORMANCE

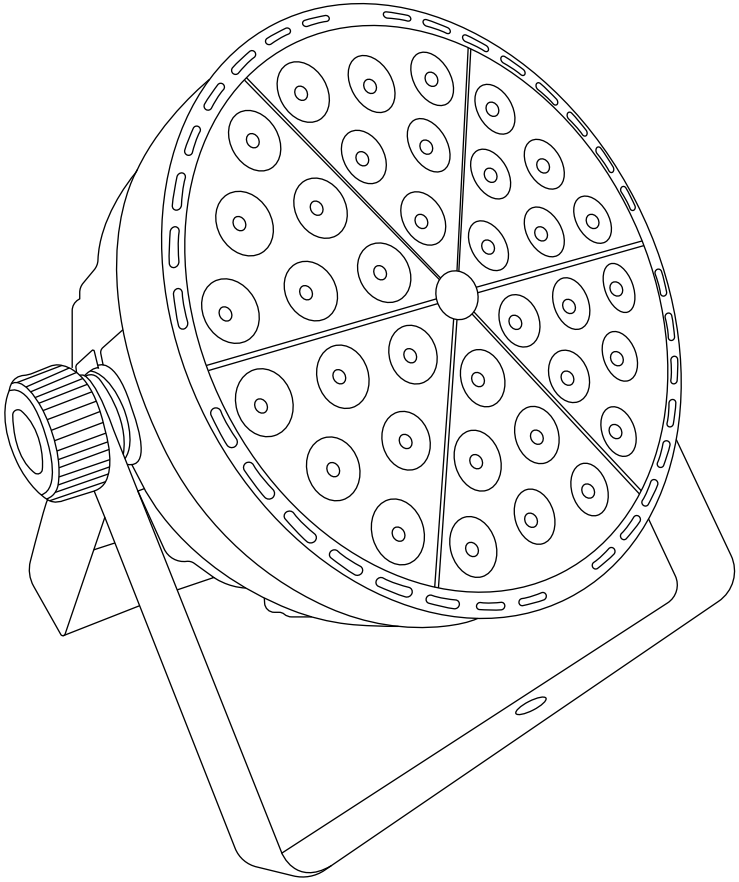

PAR 36x3

MANUAL DE USUARIO

Foreword

Thanks for using our LED Stage Lighting Equipment. Before using, please read the instruction carefully. The instruction include important installing and using information. Please use the fixtures following the instruction and keep the user manual properly.

Our product use engineering plastic shell which is new, beautiful and can bear high temperature and high hardness metal body. Our product strictly follow the standard of CE and CCC to design and product. It's conform to the international standard DMX512 signal protocol. It's can be use alone or connect together. It's have rotation fast, low noise and multifunctional as the product's feature. It's special for KTV, Dance hall, Night club, Bar and so on.

Digital show function form

No	Show	Function	Value	Instruction
1	A001	DMX address	001~512	UP,DOWN increase or reduce the value,
2	7CH/5 CH	Channel Mode	UP DOWN	7CH mode, 5CH mode up and down keys to switch
3	r255	Red dim	000~255	UP,DOWN Change brightness
4	G255	Green dim	000~255	UP,DOWN Change brightness
5	b255	Blue dim	000~255	UP,DOWN Change brightness
6	FH99	Strobe	01 ~ 99	UP,DOWN change the speed
7	CL01	Colors choose	01 ~ 08	UP,DOWN Change color
8	CC99	Colors Jump	01 ~ 99	UP,DOWN change the speed
9	DE99	Colors Gradate	01 ~ 99	UP,DOWN change the speed
10	CP99	Colors Pulse	01 ~ 99	UP,DOWN change the speed
11	SU01	Colors sound-Active	01~16	UP、DOWN Change the effects

DMX Mode

5 Channels Mode

Channel	Function	Instruction
1CH	0-255	Dimming
2CH	0-255	Strobe（From Slow To Fast）
3CH	0-255	R Dimming 0-100%
4CH	0-255	G Dimming 0-100%
5CH	0-255	B Dimming 0-100%

7 Channels Mode

Channel	Function	Instruction
1CH	0-255	Dimming
2CH	0-255	Strobe（From Slow To Fast）
3CH	0-255	R Dimming 0-100%
4CH	0-255	G Dimming 0-100%
5CH	0-255	B Dimming 0-100%
6CH	1-127	Change the Color
	128-190	Jump-Change Color
	190-250	Gradual-Change Color
	251-255	Sound Control
7CH	Function/Speed	Slow to Fast (At the Colors output and sound choose the color)

Specification

Voltage: AC100~240V, 50/60Hz
Power: 120W
Light source: 36pcs x 3W RGB 3 in 1
Material: Plastic body
DMX Channels: 5CH/7CH
Inner size: 210*115*230MM
GW: 3KG