




alienpro.com.mx

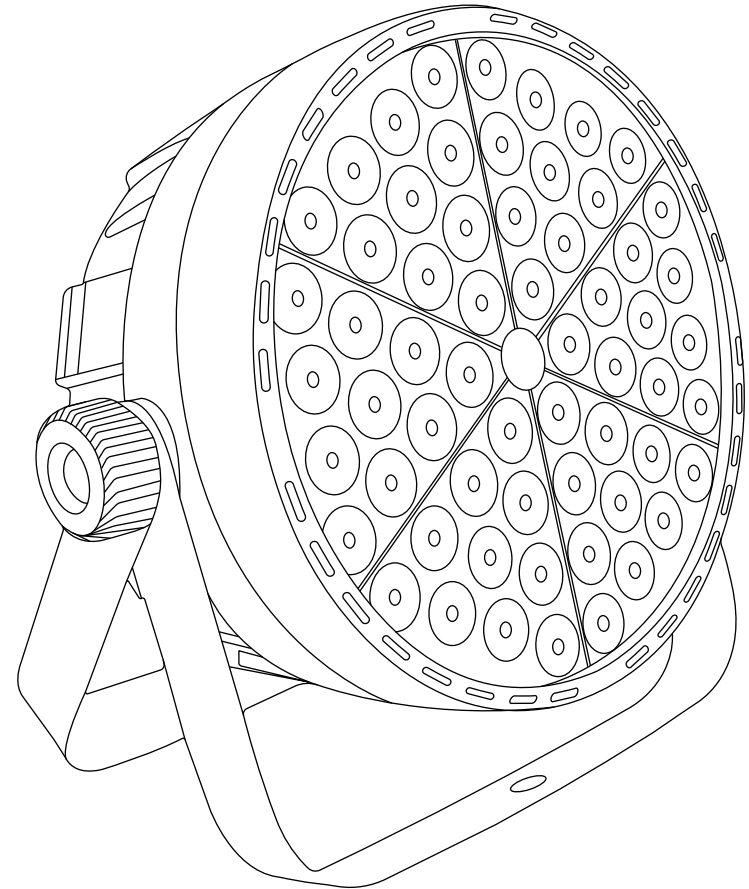

PAR 60x3W

MANUAL DE USUARIO

20 Channels Mode

Channel	Function	Instruction
CH1	000-255	Dimming
CH2	000-255	Strobe (From Slow To Fast)
CH3	000-255	R1 Dimming 0-100%
CH4	000-255	G1 Dimming 0-100%
CH5	000-255	B1 Dimming 0-100%
CH6	000-255	R2 Dimming 0-100%
CH7	000-255	G2 Dimming 0-100%
CH8	000-255	B2 Dimming 0-100%
...
CH18	000-255	R6 Dimming 0-100%
CH19	000-255	G6 Dimming 0-100%
CH20	000-255	B6 Dimming 0-100%

23 Channels Mode

Channel	Function	Instruction
1CH	000-255	Dimming
2CH	007-255	Strobe (From Slow To Fast)
3CH	000-003	No effect
	004-007	Custom effect
	008-011	Custom effect
	012-015	Custom effect
	016-019	Custom effect
	020-023	Custom effect
	024-027	Custom effect
	028-031	Custom effect
	032-035	Custom effect
	036-039	Custom effect
	040-043	Custom effect
	044-047	Custom effect
	048-051	Custom effect
	052-054	Predefined effect 1
	055-057	Predefined effect 2
	058-060	Predefined effect 3
3CH
	235-237	Predefined effect 62
	238-240	Predefined effect 63
	241-243	Predefined effect 64
	244-255	Sound control effect
4CH	000-255	Speed change
5CH	000-255	Color choose
6CH	000-255	R1 Dimming 0-100%
7CH	000-255	G1 Dimming 0-100%
8CH	000-255	B1 Dimming 0-100%
9CH	000-255	R2 Dimming 0-100%
10CH	000-255	G2 Dimming 0-100%
11CH	000-255	B2 Dimming 0-100%
12CH	000-255	R3 Dimming 0-100%
13CH	000-255	G3 Dimming 0-100%
14CH	000-255	B3 Dimming 0-100%
15CH	000-255	R4 Dimming 0-100%
16CH	000-255	G4 Dimming 0-100%
17CH	000-255	B4 Dimming 0-100%
18CH	000-255	R5 Dimming 0-100%
19CH	000-255	G5 Dimming 0-100%
20CH	000-255	B5 Dimming 0-100%
21CH	000-255	R6 Dimming 0-100%
22CH	000-255	G6 Dimming 0-100%
23CH	000-255	B6 Dimming 0-100%

Foreword

¡Congratulations on your purchase!
Please read this manual carefully and keep it for future reference.
If you need additional help, please contact your provider.

Specifications

Voltage: AC100~240V, 50/60Hz
Power: 100W
Light source: 60pcs x 3W RGB 3 in 1
Material: Plastic body
DMX Channels: 2/3/5/8/18/20/23CHs
Inner size: 230x115x22 OMM
GW: 3KG

Menu Description

Content	Function	Instruction
A001	001- 512	DMX address
8CH	02/03/05/ 08/18/20/23	Channel Mode
d-FA	SL/FA	Dimming slow/fast
FF00	00-99	Strobe (From Slow To Fast)
R255	000 - 255	Red dim
G255	000 - 255	Green dim
B255	000 - 255	Blue dim
AU 1	1-7	Colors choose
EF64	1 - 64	Effect choose
SP00	00 - 99	Speed change
Sud0	0 - 9	Speed/Sound Control Sensitivity
Id01	Id01-Id27	18 Channel Mode: ID1: 01# dmx512 ID2: 19# dmx512 ID27: 487# dmx512

DMX Mode

2 Channels Mode

Channel	Function	Instruction
1CH	000-000	No effect
	001-004	Predefined effect 1
	005-008	Predefined effect 2
	009-012	Predefined effect 3

	245-248	Predefined effect 62
	249-252	Predefined effect 63
	253-255	Predefined effect 64
2CH	000-255	Speed change

3 Channels Mode

Channel	Function	Instruction
1CH	000-255	R Dimming 0-100%
2CH	000-255	G Dimming 0-100%
3CH	000-255	B Dimming 0-100%

5 Channels Mode

Channel	Function	Instruction
1CH	000-255	Dimming
2CH	000-255	Strobe (From Slow To Fast)
3CH	000-255	R Dimming 0-100%
4CH	000-255	G Dimming 0-100%
5CH	000-255	B Dimming 0-100%

DMX Mode

8 Channels Mode

Channel	Function	Instruction
1CH	000-255	Dimming
2CH	000-255	Strobe (From Slow To Fast)
3CH	000-003	No effect
	004-007	Custom effect
	008-011	Custom effect
	012-015	Custom effect
	016-019	Custom effect
	020-023	Custom effect
	024-027	Custom effect
	028-031	Custom effect
	032-035	Custom effect
	036-039	Custom effect
	040-043	Custom effect
	044-047	Custom effect
	048-051	Custom effect
	052-054	Predefined effect 1
	055-057	Predefined effect 2
	058-060	Predefined effect 3

	235-237	Predefined effect 62
238-240	Predefined effect 63	
241-243	Predefined effect 64	
244-255	Sound control effect	
4CH	000-255	Speed change
5CH	000-255	Color choose
6CH	000-255	R1 Dimming 0-100%
7CH	000-255	G1 Dimming 0-100%
8CH	000-255	B1 Dimming 0-100%

18 Channels Mode

Channel	Function	Instruction
CH1	000-255	Strobe (From Slow To Fast)
CH2	000-255	R1 Dimming 0-100%
CH3	000-255	G1 Dimming 0-100%
CH4	000-255	B1 Dimming 0-100%
CH5	000-255	R2 Dimming 0-100%
CH6	000-255	G2 Dimming 0-100%
...
CH16	000-255	R6 Dimming 0-100%
CH17	000-255	G6 Dimming 0-100%
CH18	000-255	B6 Dimming 0-100%